


TOE PILOT FOOT CONTROL #03811 INSTALLATION INSTRUCTIONS

Careful consideration should be given to determining the optimum mounting height of the pedal components. Some people may prefer the Foot Control mounted 1 to 2 inches lower than most existing footbrace placements. In general, the smaller the shoe size of the owner, the lower the pedals may be mounted for optimum paddling comfort. We recommend that the Toe Pilot Pedal near the top of the ball of the foot. It is a good idea to get a feel for your correct height by using a demo kayak with a Vertical Adjustment Plate at your SmartTrack dealer. If you wish to mount the Foot Control using the existing holes in your boat or if you want to be able to adjust pedal height for different users, we recommend using a SmartTrack Vertical Adjustment Kit #03848.

1. Remove any existing footbrace and all hardware.
2. Clean hull around the footbrace area, inside and out.
3. You may use existing footbrace mounting holes which measure 14 ½ in. apart. If you wish to mount the Toe Pilot Foot Control lower than your existing footbrace, or if the existing holes do not measure 14 ½ in. apart, we recommend using the Vertical Adjustment Kit.
4. Determine proper location of Toe Pilot Foot Control, taking into consideration the recommendations given above, as well as bulkhead location and leg length.
5. Install the Toe Pilot Foot Control using the 1/4 in. mounting screws included with it. The neoprene washers, also included, should be placed between the hull and the Foot Control. Tighten the screws enough to compress the neoprene washers between the hull and the side rails.

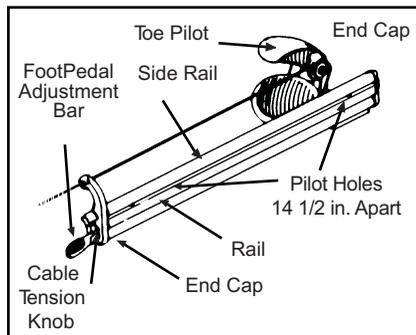

SmartTrack™
CONTROL SYSTEM
- www.smart-tracker.com -

©2006 SmartTrack, LLC. PN 33-135